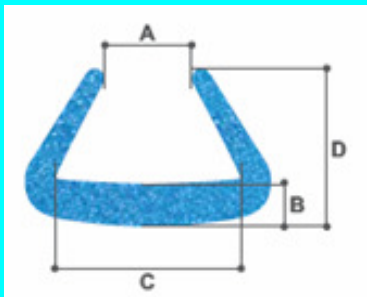


Especificación De Producto

Perfil U

	Denominación	A (mm)	B (mm)	C (mm)	D (mm)	Densidad (Kg/m3)
	U8-18	7 (-3+2)	9 (-1+2)	18, ±2	30, ±2	27 ± 5
	U15-25	10 (-3+2)	9 (-1+2)	24, ±2	35, ±2	27 ± 5
	U15-30	10 (-3+2)	11 (-1+2)	32, ±2	40, ±2	27 ± 5
	U25-45	20, ±4	12 (-1+2)	43, ±3	50, ±3	27 ± 5
	U40-60	30, ±5	13 (-1+2)	58, ±3	60, ±3	27 ± 5
Color: Azul Longitud: 2000mm ± 20mm						

Composición Base:

Polietileno de baja densidad (LDPE)
 Agente hinchante
 Nucleante

Características más importantes:

Espuma de Polietileno expandido de celdilla cerrada fabricado por extrusión directa
 No Contiene CFC
 Reciclable (grupo 04)
 Termoplástico (TP)
 Excelente resistencia al agua
 Buena resistencia a los disolventes excepto hidrocarburos clorados y alifáticos.


Departamento Emisor: Calidad

Realizado por:	Revisado por:	Aprobado por:
Peñarroya Manel, Superv. Calidad & M. Ambiente 11/03/2011	Peñarroya Manel, Superv. Calidad & M. Ambiente 11/03/2011	Peñarroya Manel, Superv. Calidad & M. Ambiente 11/03/2011



Product Specification

Profile U

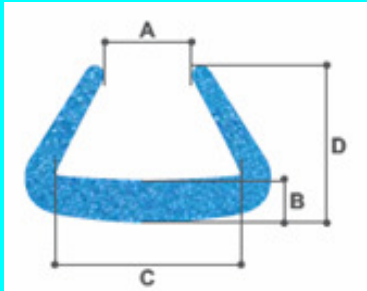	Denomination	A (mm)	B (mm)	C (mm)	D (mm)	Density (Kg/m3)
	U8-18	7 (-3+2)	9 (-1+2)	18, ±2	30, ±2	27 ± 5
	U15-25	10 (-3+2)	9 (-1+2)	24, ±2	35, ±2	27 ± 5
	U15-30	10 (-3+2)	11 (-1+2)	32, ±2	40, ±2	27 ± 5
	U25-45	20, ±4	12 (-1+2)	43, ±3	50, ±3	27 ± 5
	U40-60	30, ±5	13 (-1+2)	58, ±3	60, ±3	27 ± 5

Colour: Blue

Length: 2000mm ± 20mm

Composition:

Low Density Polyethylene.
Blowing agent.
Talc.

Main Properties:

PE Foam of closed cells, produced directly by extrusion.
CFC'S free.
Recyclable (code 04)
Thermoplastic (TP)
Excellent resistance to water
Resistance to solvents except chlorinated and aliphatic hydrocarbons

Departamento Emisor: Calidad

Realizado por:

Peñarroya Manel, Superv. Calidad
& M. Ambiente
11/03/2011

Revisado por:

Peñarroya Manel, Superv. Calidad
& M. Ambiente
11/03/2011

Aprobado por:

Peñarroya Manel, Superv. Calidad
& M. Ambiente
11/03/2011